

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
18 August 2005 (18.08.2005)


PCT

(10) International Publication Number  
**WO 2005/075151 A1**

- (51) International Patent Classification<sup>7</sup>: **B25C 5/02** (74) Agent: **JOHANNESSON, Urban**; Isaberg Rapid AB, Box 115, S-330 27 Hestra (SE).
- (21) International Application Number: PCT/SE2004/001897 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 16 December 2004 (16.12.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0400223-4 5 February 2004 (05.02.2004) SE
- (71) Applicant (for all designated States except US): **IS-ABERG RAPID AB** [SE/SE]; Box 115, S-330 27 Hestra (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **IVARSSON, Bengt** [SE/SE]; Kärningabacka, S-335 93 Åsenhöga (SE).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,

[Continued on next page]

(54) Title: STAPLER

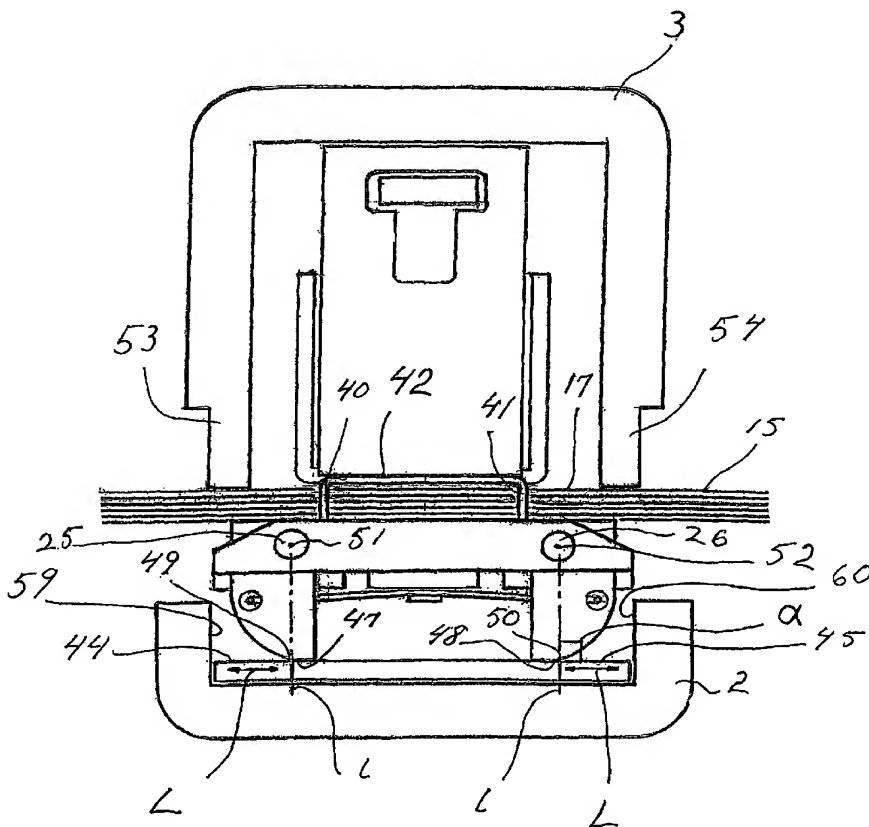

(57) Abstract: Stapler (1) which comprises a base part (2) and a stapling unit (3). The base part consists of a lower part (5) and an upper part (6) which are connected together such that they can be moved towards and away from each other, and between which parts is arranged a first elastic element (8) which, in an initial position, moves the upper and lower parts apart. A workpiece to be stapled is placed on the upper part (6), where an opening (31) is arranged through which the legs of the staple is driven after that the legs have driven through the workpiece, and to which upper part bending devices (21, 22), pivotable about pivot pins (25, 26), are connected. The upper part being blocked from moving downward by a blocking arrangement (21, 22, 25, 26, 44, 45) when the driver drives the staple legs through the workpiece. The blocking device is disengaged by means of a releasing device (53, 54, 55, 56) when the staple crown (40) contacts the upper surface (17) of the workpiece.



SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*